

PRODUCT INFORMATION BULLETIN

COLOR REVERSAL FILMS

FUJICHROME Velvia 100 Professional [RVP100]

1. FEATURES AND USES

FUJICHROME Velvia 100 Professional [RVP 100] is a daylight-type high-image-quality color reversal film with an ISO speed rating of 100. In addition to the world's highest level of color saturation, this film boasts an RMS granularity of 8, making it suitable for scenery, nature photography and other subjects that demand precisely modulated, vibrant color reproduction and high image quality.

Features

- ISO 100 Speed** Easy-to-use ISO 100 rating with the world's highest level of color saturation.
- Ultrahigh-saturation Color Reproduction** ... Attainment of the world's highest color saturation level equal to that of Velvia (ISO50) through the incorporation of new cyan, magenta and yellow couplers.
- Super-fine Grain** RMS granularity of 8, one of the finest level.
- Color Image Storage Permanence** ... Color image storage permanence (anti-fading characteristics) equal to that of RVP 100F as a result of new couplers.
- Superb Push/Pull Processing Suitability** Minimum variation in color and gradation during push/pull processing over a range from $-1/2$ to $+1$ stop, providing an expanded range of photo-taking opportunities, as well as facilitating fine adjustments in exposure and density during processing and allowing an increase in speed of up to $+2$ stops (equal to EI 400), depending on the scene.

* RMS stands for "Root Mean Square", a widely used standard method for measuring the degree of grain in photographic film. The lower the RMS number, the smaller the apparent grain.

2. SPEED

Light Source	Speed	Color Balancing Filter
Daylight	ISO 100/21°	None
Tungsten Lamps (3200K)	ISO 32/16**	No. 80A** (LBB-12***)

* Indicates the effective speed resulting from designated filter use.

** Wratten Filter

***Fuji Light Balancing Filter (not available in certain markets.)

3. FILM SIZES, EMULSION NUMBER, BASE MATERIAL AND THICKNESS

Sizes	Emulsion Number	Base Material	Base Thickness
• Rolls* 135 ... 36-exp. ... 36-exp. (5-roll pack) 20-roll pack) 35mm x 30.5 (100 ft.)	#460-	Cellulose Triacetate	127 μm
120 ... 12-exp. ... 12-exp. (5-roll pack) 220 ... 24-exp. (5-roll pack)			98 μm
• Sheets* 4 x 5 in. (10.2 x 12.7 cm) ... 10 sheets and 50 sheets 8 x 10 in. (20.3 x 25.4 cm) ... 10 sheets QuickLoad 4 x 5 in. ... 20 sheets		Polyester	175 μm

* Some sizes are not available in certain markets.

4. EXPOSURE GUIDE

Use a meter to determine the exposure setting. If a meter is not available, refer to the following table.

Light Conditions	Seashore or Snow Scenes under Bright Sun	Bright Sunlight	Hazy Sunlight	Cloudy Bright	Cloudy Day or Open Shade
Lens Aperture	f/16	f/11	f/8	f/5.6	f/4

NOTES

(Exposure time: 1/250 sec.)

- The settings are for 2 hours after sunrise and 2 hours before sunset.
- Provide a lens opening 1/2-stop smaller during the summer and 1/2-stop larger during the winter (except for snow scenes).
- Excessively bright (or dark) or backlighted subjects may require plus (or minus) 1-stop lens opening adjustments.

5. EXPOSURE FOR VARIOUS LIGHT CONDITIONS

Daylight

Under usual daylight conditions, color balancing filters are not necessary. For the following exposure conditions, however, the indicated filters are recommended.

- A UV filter No. 2C* (SC-39 or SC-40)** or other appropriate ultraviolet absorbing filter is recommended for scenes that are receiving strong ultraviolet light from the sun, such as seaside locations, snow scenes, and bright distant views.

- Excessively high or low color temperatures may require the following filters and exposure corrections.

Subject Conditions	Filter	Exposure Correction
<u>High Color Temperature:</u> Cloudy weather landscapes or portraits in open shade in clear weather.	No.81A* (LBA-2)***	+1/3 stop****
<u>Low Color Temperature:</u> Morning and evening twilight scenes and portraits.	No.82A* or No.82C* (LBB-2 or LBB-4)***	+1/3 to +2/3 stop****

- * Wratten Filter
- ** Fuji Sharp-cut Filter
- *** Fuji Light Balancing Filter (not available in certain markets.)
- **** A "+" followed by a number indicates the required increase in lens opening.

Electronic Flash

- Electronic flash produces light similar to daylight, so filters are not needed. However, the possibility of undesirable effects on color balance, due to various factors (differences in equipment, use duration, etc.) should be taken into consideration. Test exposures are recommended.
- The use of a flash meter is advisable, but the following formula can also be used to obtain a satisfactory lens opening.

$$\text{Aperture (F-number)} = \frac{\text{Electronic Flash Guide Number (at ISO 100)}}{\text{Electronic Flash-to-Subject Distance}}$$

- Set the film speed at ISO 100. Since the amount of light reflected onto the subject from surrounding surfaces will differ with the conditions, refer to the flash unit instructions.

Daylight Photoflood / Photo-Reflector Lamps

- Daylight-type photoflood or photo-reflector lamp output may be lower than that indicated by the exposure meter. It is recommended to compensate for the difference by increasing the exposure time by lowering the shutter speed or by increasing the lens opening. Whenever possible, test exposures are recommended.
- Other factors that should be considered when determining the exposure settings are lamp configuration, length of time used and line voltage, as they may affect lamp output and color balance.

Fluorescent Lamps

- The use of the following combinations of color compensating filters is advisable when photographing under fluorescent lighting.
- For exacting work, however, test exposures are recommended because lamp brand and age may affect light output and color balance.

Fluorescent Lamp Type	White (W)	Daylight (D)	Cool White (CW)	Warm White (WW)
Color Compensating Filters*	5B+10M	30R	20M	No. 80C+15M
Exposure Corrections**	+1/2 stop	+1 stop	+2/3 stop	+1 1/3 stops

(Exposure time: 1/2 sec.)

- * Wratten Color Compensating Filters or Fuji Color Compensating Filters are recommended.
NOTE: No. 80C is a Wratten Color Conversion Filter.
- ** Exposure correction values when using a filter relative to unfiltered exposure results. A "+" followed by a number indicates the required increase in lens opening.

NOTES

- Use a shutter speed slower than 1/30 second.
- For shutter speeds of 2 minutes or more, exposure adjustments will be necessary to compensate for reciprocity law failure.

Tungsten Lamps

- A Wratten Filter No.80A (or Fuji Light Balancing Filter LBB-12) is required when using 3200K tungsten lighting. A 2 2/3-stop larger lens opening is also required.
- If household tungsten lighting (room lamps, etc.) constitutes the main source of illumination, in addition to the above filter a Wratten Filter No.82A (or Fuji Light Balancing Filter LBB-2) is required, plus an aperture increase of 1/3 stop (total 2 stops).

Mixed Light Sources

Under mixed light conditions, the basic filter configuration should suit the main light source. In the case of cameras with TTL metering, there is no need for additional exposure compensation for any CC filter(s) used.

6. LONG AND MULTIPLE EXPOSURE COMPENSATION

No exposure correction or color balance compensation is required for exposures within a shutter speed range of 1/4000 second to 1 minute. However, for exposures of 2 minutes or longer, 'reciprocity law failure'-related color balance and exposure compensations are required.

Exposure Time	1/4000 sec. – 1 min.	2 min.	4 min.	8 min.
Color Compensating Filter	None	2.5M	2.5M	2.5M
Exposure Corrections*		+ 1/3 stop	+ 1/2 stop	+ 2/3 stop

- * Exposure correction values when using a filter relative to unfiltered exposure results. A "+" followed by a number indicates the required increase in the lens opening.

Multiple Exposures

No exposure correction or color balance compensation is required for up to four consecutive multiple exposures using an electronic flash. In the case of eight consecutive multiple exposures, a 2.5G color compensating filter is required with a 1/3- stop larger lens opening.

NOTE Exposure correction values given above for long and multiple exposures are for a reversal film with an average emulsion when processed under standard processing conditions. Therefore, use the data only as a guide. For exacting work, test exposures are recommended under actual shooting conditions.

7. EXPOSURE PRECAUTIONS

- With artificial light, such as electronic flash, photoflood, fluorescent, tungsten, high intensity discharge lamp (metal halide, sodium, mercury vapor), etc., the lamp output and color temperature may be affected by such factors as brand, age of equipment and line voltage. Reflectors and diffusers can also influence light intensity and color temperature.
- When using an accessory such as a reflector umbrella, reflector or diffuser to control light intensity or diffuse the light, the color of the light may be altered by changes that have occurred in the color or composition of the accessory's materials or reflective surface.

8. UNPROCESSED FILM HANDLING / STORAGE

HANDLING

- Expose film before the expiration date indicated on the film package and process as soon as possible after exposure.
- When removing film stored at low temperatures (in a refrigerator or freezer, etc.), allow it to reach room temperature before opening it. Opening film while it is still cold may cause condensation to form on the film surface, causing color changes or the emulsion to become more susceptible to scratches.
- Roll film should be loaded and unloaded quickly and away from direct sunlight.
- Film loaded in cameras should be exposed and processed promptly.
- Sheet film must be handled in total darkness and with care so as not to touch the emulsion surface.
- X-rays inspection machines used to inspect checked-in baggage at airports can cause fogging of film. Put both exposed and unexposed film into carry-on baggage (preferably in a transparent plastic bag or a net bag that allows the film to be seen). Because of the increasing number of airports using strong X-ray machines for carry-on baggage, it is recommended that you remove film from your carry-on baggage and request a visual (manual) inspection of your film.
- Film fogging may occur near X-ray equipment used in hospitals, factories, laboratories and other places where radiation is used. Always keep film away from sources of radiation.

STORAGE

Storing exposed or unexposed film under hot and humid conditions may adversely affect the speed, color balance and physical properties of the film. Although it is best to store film at a low temperature, for practical purposes, film should be stored as follows:

Short-term Storage	Store at a place (cool and dark) away from direct sunlight or high temperatures and humidity.
Long-term Storage	Store at 10°C (50°F) or below

- New building materials, newly manufactured furniture, paints and bonding agents may produce gases which could affect photographic film. Do not store film, lightproof boxes containing film or cameras or film holders loaded with film near these materials.
- Film should be sealed in plastic bags* prior to cold storage. When taken out of cold storage, film should be allowed to reach room temperature before opening by letting it stand over 3 hours (for refrigerated film) or over 6 hours (for frozen film).

* Polyester, polystyrene, polyethylene, polypropylene, etc.

9. PROCESSING

This film is designed for processing by Process E-6 or its equivalent, as well as Fujifilm Process CR-56.

10. PROCESSED FILM HANDLING / STORAGE

Since the purpose of film is to provide a long-term record of memorable events, as much effort as possible has been made to use materials that exhibit the least amount of change over time, but the effects of light, heat, atmospheric oxygen, contaminant gases, humidity and mold cannot be completely avoided. It is possible, however, to minimize change in the photographic image or base material by maintaining appropriate storage conditions, such as those used by museums and art galleries. Temperature and humidity control is the most important key to minimizing the change that occurs in film. Processed film stored in the dark under the following conditions may be expected to show almost no change over time.

Storage Period with Almost No Change	Temperature	Relative Humidity
More than 20 years	Below 10°C	30%–50%
10–20 years	Below 25°C	30%–50%

(1) Color reversal film should be mounted inserted into sleeves* for storage.

* Polyester, polystyrene, polyethylene, polypropylene, etc.

(2) Processed film should be stored at a place as far away as possible from high temperatures, direct sunlight and other strong light. The following conditions are not desirable for the storage of film and should be avoided in the case of long-term storage:

- Storage in a closet lying against a wall that is exposed to cold, outside air (where condensation may form).
- Storage in an attic or on top of a closet or cabinet near the ceiling (where high temperatures may occur).

11. LIGHT SOURCES FOR VIEWING

Use a standard transparency viewer. Visual responses will differ with light source quality and brightness. Therefore, employ a viewer which meets the ISO/ANSI standard.*

* The ISO standard (ISO 3664:2000) specifies an illuminated viewer surface with a color temperature derived from a CIE illuminant D50 (D:Daylight) with a reciprocal color temperature of 5000K, an average brightness of 1270cd/m² ± 320cd/m², a brightness uniformity of more than 75%, a light diffusion level of more than 90% and an average color rendition assessment value of more than Ra90. Transparency viewers should meet these standards.

12. PRINTS AND DUPLICATES


This film can produce high-quality prints when used with digital printers such as the Fuji Digital Minilab Frontier. High-quality duplicates can be made on FUJICHROME DUPLICATING FILM CDU TYPE II (CDU II).

13. RETOUCHING AND BLEACHING





Changes in density and color balance can be made by using readily available retouching dyes. In regard to bleaching, this film is as resistant to color dye fading as Velvia 100F, as a result of its improved color image stability (anti-fading characteristics).


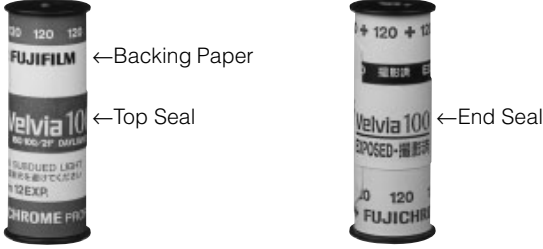









14. SHEET FILM CODE NOTCHING

A notch code identifying this emulsion type is located in the upper right-hand corner when the emulsion surface is facing toward you. The same notch is provided for QuickLoad type films.



15. PACKAGING

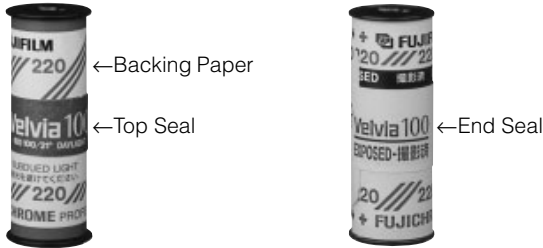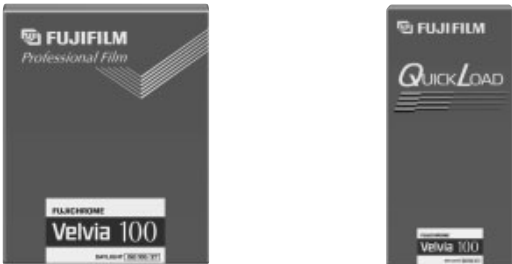
Size	Item	Contents
135	Film Box	New Exclusive Design Identification Color: Violet Blue 
	Plastic Case	Same as the current product (Transparent container with a black cap).
	Cartridge	New Exclusive Design Identification Color: Violet Blue 
120	Film Box	New Exclusive Design Identification Color: Violet Blue   5 roll pack

Size	Item	Contents
120	Envelope	
	Backing Paper and Seal	Backing paper: FUJICHROME Exclusive Design Seal: Exclusive Design  ← Backing Paper  ← Top Seal  ← End Seal
220	Film Box	New Exclusive Design Identification Color: Violet Blue  <p>5 roll pack</p>
	Envelope	
	Backing Paper and Seal	Backing paper: FUJICHROME Exclusive Design Seal: Exclusive Design  ← Backing Paper  ← Top Seal  ← End Seal
	Sheet	Film Box, Label and Seal New Exclusive Design Identification Color: Violet Blue  


16. PROCESSED FILM EDGE MARKINGS*

<Rolls>


• 135 Size

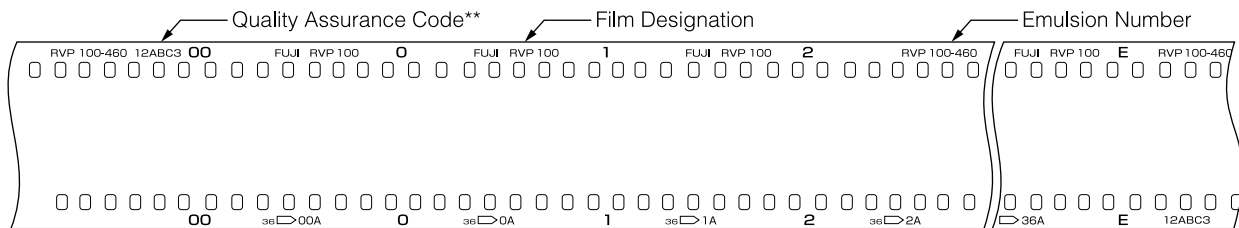

• 120 Size

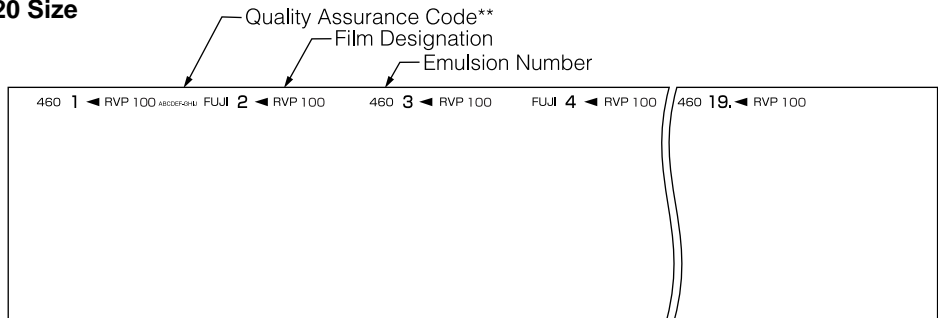


• 220 Size

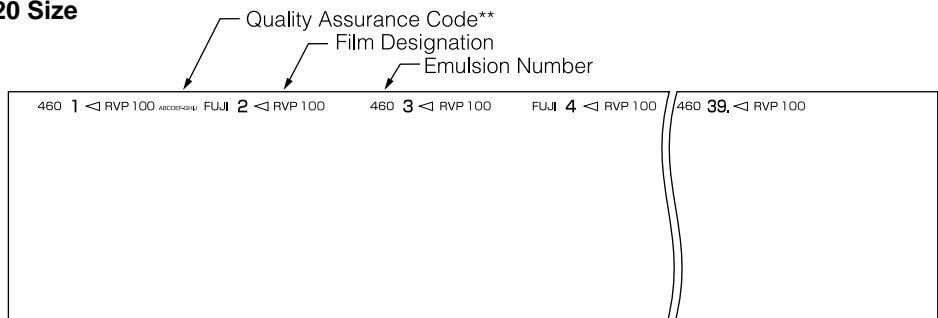


<Sheets>

• Standard Sheet Film

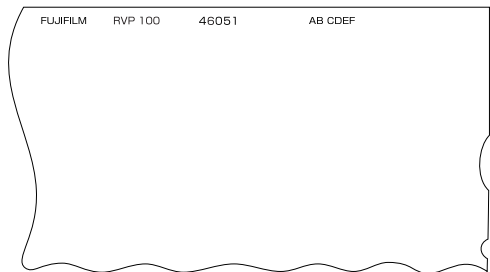

• QuickLoad

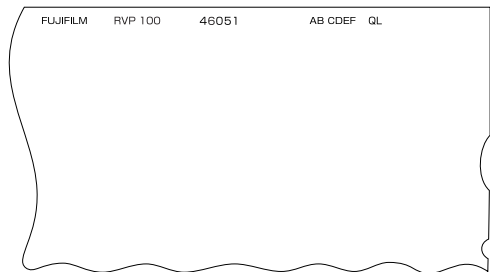

NOTES

- * The emulsion is on the opposite side. (Base side facing you)
- ** This code represents an identification marking enabling Fujifilm's manufacturing quality control system to assure individual quality.

17. TECHNOLOGIES INCORPORATED IN Velvia 100

17-1 PSHC (Pure, Stable & High-performance dye-forming Coupler) Technology

The new-generation couplers used in Velvia 100 provide it with high color purity, stability and color formation efficiency, making possible color reproduction with unprecedented fidelity and excellent image stability. This vividness forms the basis for Velvia 100's ability to reproduce colors with ultra-high saturation.

- a) X-Coupler Technology:
This marks the recent use in color reversal film of Fujifilm's new proprietary cyan coupler.
- b) V-Coupler Technology:
New technologies have been incorporated with the V-coupler applied in Velvia 100F.
- c) S-Coupler Technology:
In place of the yellow coupler used in FUJICHROME films providing these films with Fujifilm's trademark color reproduction and stability, a new-generation yellow coupler has been incorporated to further boost these characteristics to even higher levels. Compared with existing FUJICHROME films, the X, V and S couplers have resulted in a drastic reduction in auxiliary absorptive components (which cause muddiness) and provide high color stability.


17-2 CEL (Color-Extension Layer) Technology

The Multi-layer Color Correction Layer that enabled faithful color hue reproduction in Velvia 100F has been adjusted and applied in Velvia 100 as a color-extension layer. This layer, together with new-generation couplers and adjusted gradation and spectral sensitivity, gives Velvia 100 the ability to record the colors of sunrises, sunsets, natural greenery and other scenes with a vibrancy beyond that normally perceived by the human eye.

17-3 MSSC (Multi-Structured Sigma Crystal) Technology

This technology is incorporated in Velvia 100 to improve upon the highly acclaimed ultrafine grain emulsion technology used in PROVIA 100F, resulting in a greater enhancement in grain quality. With this technology as a basis, Velvia 100 continues to provide ultra-high color saturation along with super-fine grain quality (RMS=8) and high sensitivity (ISO 100) that exceed the levels of the current ISO 50 Velvia.

18. FILM STRUCTURE

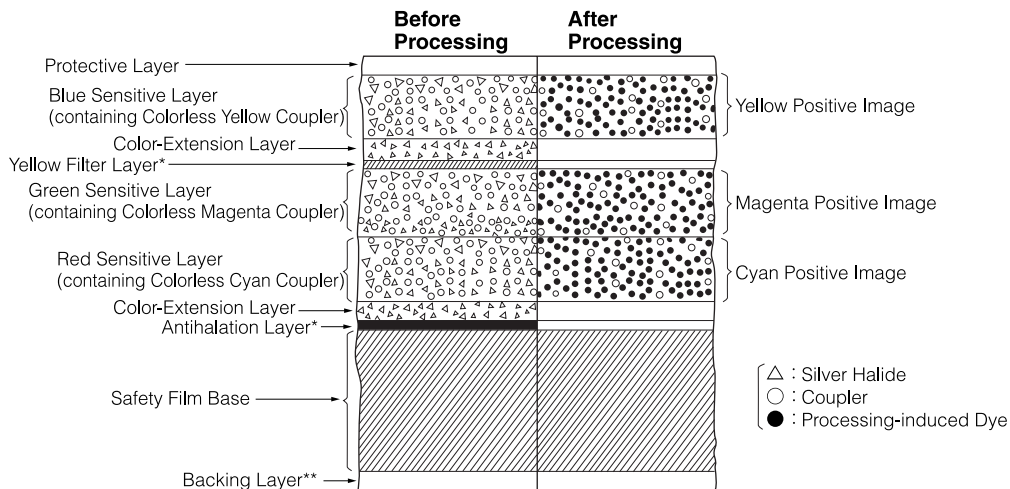

* These layers become colorless and transparent after processing.

** The backing layer becomes colorless and transparent after processing, but it is not provided with 135 size film.


19. DIFFUSE RMS GRANULARITY VALUE 8

Read at a gross diffuse visual density of 1.0, using a 48-micrometre aperture.


20. RESOLVING POWER

Chart Contrast 1.6:1 **80** lines/mm
 Chart Contrast 1000:1 **160** lines/mm

21. CHARACTERISTIC CURVES

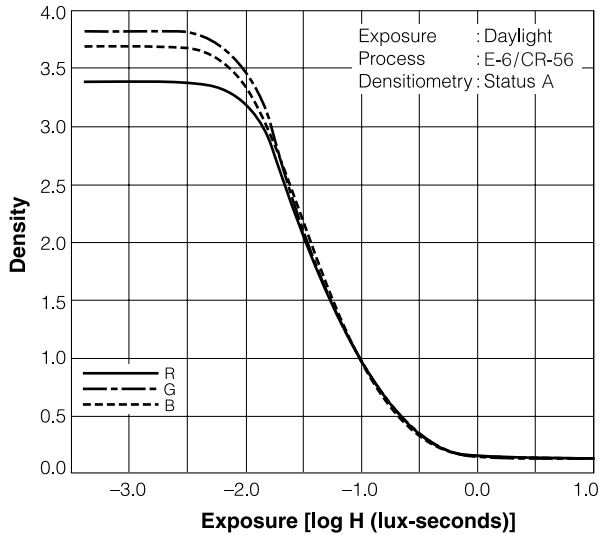


22. SPECTRAL SENSITIVITY CURVES

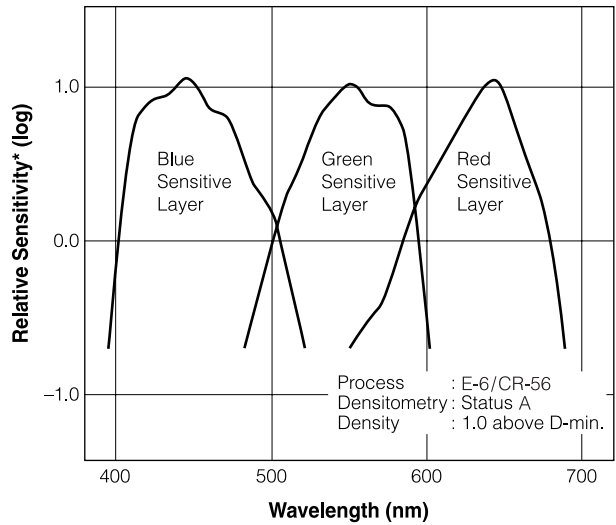


* Sensitivity equals the reciprocal of the exposure (J/cm²) required to produce a specified density.

23. MTF CURVE

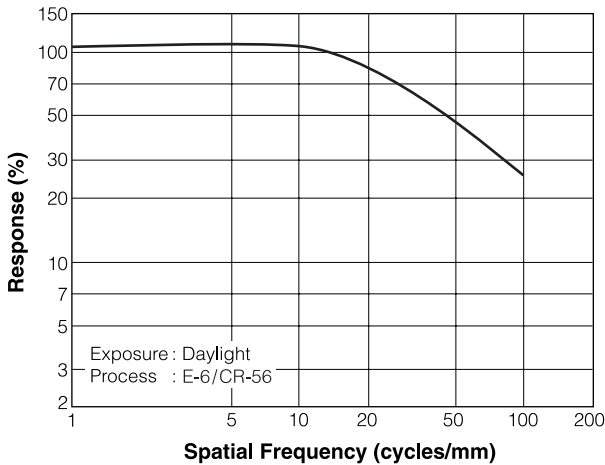

24. SPECTRAL DYE DENSITY CURVES

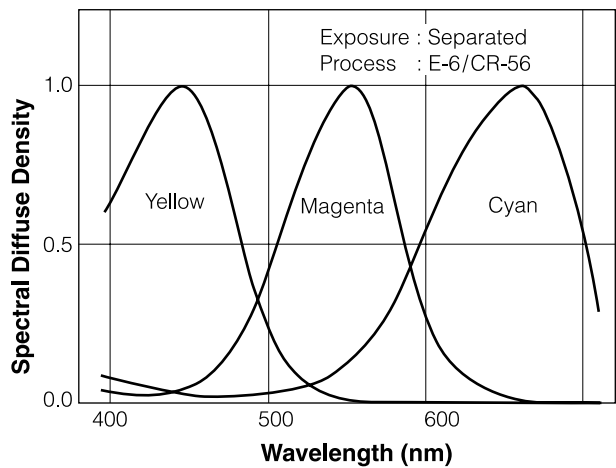

NOTICE The data herein published were derived from materials taken from general production runs. However, changes in specifications may occur without notice.